


## OD Deflashing machine

This machine is designed to Remove excess rubber from the outer diameter of the Automobile Bushes. Specific arrangement of brush height can be adapted for multiple diameters of jobs. This machine has one cleaning station and changeable brush. Job holding tool has been specially designed for this machine which helps in loading the job.

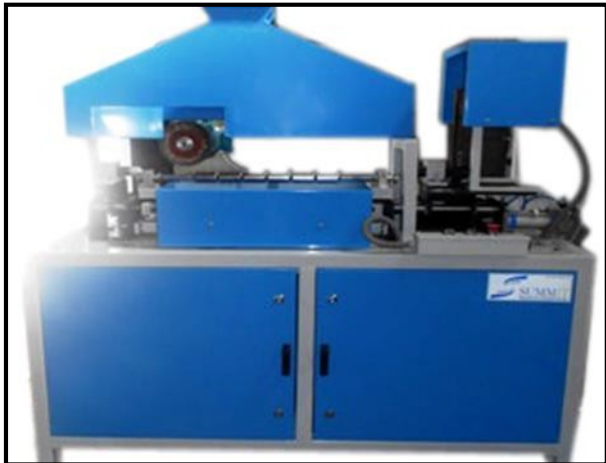

### ➤ Features:

- Frame Assembly with MS covers & doors (powder coated).
- One cleaning station with changeable brush.
- Easily Adjustable brush height with handle for different diameter of Components.
- Cleaning length can accommodate multiple components within this range.
- Specially designed job holding rods, to load the components.
- Motor for rotation of job holding rod.
- Pneumatic operated job loading station.
- Control Panel to control the quick cycle with easy access to operator.
- Localized exhaust duct which can be further connected to your exhaust system.

### ➤ Product parameters:

Machine Footprint	600mm X 1600mm
Working Height	900 m
Electrical Power Supply	415V AC, 50Hz, 2Kw
Cleaning length	410 mm
Job holding fixture	Can accommodate diameter ranging from OD 20 mm to 100mm
Cubic Feet per Minute (CFM)	3